
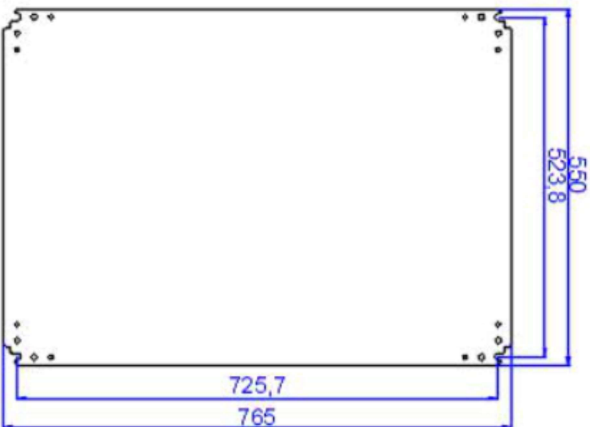


- > IP 66 Protection To IEC 60529:2013
- > Grey RAL 7035 Epoxy UV resistant Powder coat (80-120 Micron)
- > 1.5 mm thick Mild steel
- > Reversible hinged door - 120 degree opening
- > Chrome plated metal locks
- > Zinc Plated wall mounting Brackets
- > 2mm Galvanised Mounting Plate
- > Polyurethane door seal
- > Recessed gland plate with sealing gasket
- > Earth Studs

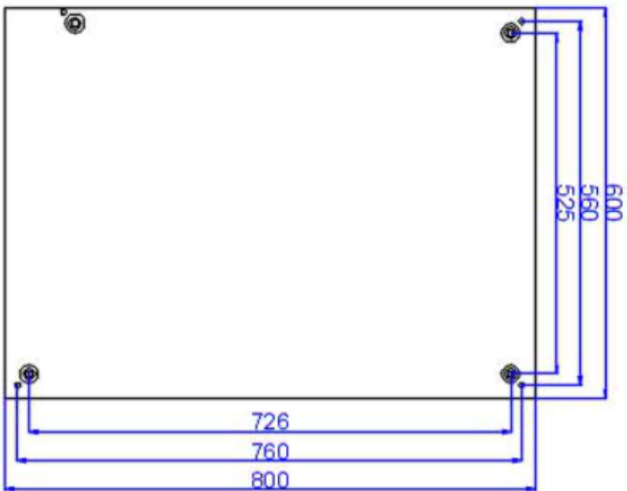

EKM806025 | 800H 600W 250D,
IP66 Electrical Enclosure

ENCLOSURE
SOLUTIONS
Heathcote, N.S.W. 2233
0448 085 061
ekm@enclosuresolutions.com.au

NB: Manufacturers drawings are subject to change without notice